

# Experimental Investigations on Exhaust Emissions Of high Grade Semi Adiabatic Diesel Engine With Linseed Biodiesel with Varied Engine Parameters

K. Vamsi Krishna<sup>1</sup>, M.V.S. Murali Krishna<sup>2</sup>

<sup>1</sup>Department of Mechanical Engineering, QIS Institute of Technology, Ongole-523272, Andhra Pradesh, India,

<sup>2</sup>Mechanical Engineering Department, Chaitanya Bharathi Institute of Technology, Gandipet, Hyderabad-500 075.Telangana State, India,

## ABSTRACT

*Investigations were carried out to study exhaust emissions of a high grade low heat rejection (LHR) diesel engine consisting of air gap insulated piston with superni (an alloy of nickel) crown, air gap insulated liner with superni insert and ceramic coated cylinder head with different operating conditions [normal temperature and pre-heated temperature] of linseed biodiesel with varied injection timing and pressure. Exhaust emissions of particulate emissions and nitrogen oxide (NO<sub>x</sub>) levels were evaluated at different values of brake mean effective pressure (BMEP) of the engine. Comparative studies were made with conventional engine (CE) and biodiesel and also with diesel operation with similar working condition. The optimum injection timing was 31° bTDC (before top dead centre) with conventional engine while it was 28° bTDC for engine with LHR combustion chamber with biodiesel operation. Particulate emissions decreased while NO<sub>x</sub> levels increased with engine with LHR combustion chamber with biodiesel in comparison with CE.*

**Key Words:** Crude vegetable oil; biodiesel; exhaust emissions; LHR combustion chamber.

## 1.INTRODUCTION

Vegetable oils are promising substitutes for diesel fuel, as they are renewable in nature and properties are comparable to diesel fuel in scenario of depletion of fossil fuels and ever increase of fuel prices in International Market and increase of pollution levels with fossil fuels. The idea of using vegetable oil as fuel has been around from the birth of diesel engine. Rudolph diesel, the inventor of the engine that bears his name, experimented with fuels ranging from powdered coal to peanut oil and hinted that vegetable oil would be the future fuel [1]. Several researchers experimented the use of vegetable oils as fuel on conventional engines. They reported that the performance was poor, citing the problems of high viscosity, low volatility and their polyunsaturated character. [1–3]. These problems can be solved to some extent, if neat vegetable oils are chemically modified (esterified) to bio-diesel. Experiments were conducted on conventional diesel engine with biodiesel operation. They reported that biodiesel increased efficiency marginally and decreased particulate emissions and increased oxides of nitrogen [4–6]. The drawbacks (high viscosity and low volatility) of biodiesel call for LHR engine which provide hot combustion chamber for burning these fuels which got high duration of combustion.

The concept of engine with LHR combustion chamber is to minimize heat loss to the coolant by providing thermal insulation in the path of the coolant thereby increases the thermal efficiency of the engine. Several methods adopted for achieving LHR to the coolant are i) using ceramic coatings on piston, liner and cylinder head (low grade LHR combustion chamber) ii) creating air gap in the piston and other components with low-thermal conductivity materials like superni (an alloy of nickel), cast iron and mild steel etc. (medium grade LHR combustion chamber) and iii) combination of low grade and medium grade LHR combustion chamber resulted in high grade LHR combustion chamber.

Studies were made on high grade LHR engine with biodiesel with varied injection timing and injection timing. [7–10]. They reported that performance was improved, decreased particulate emissions, increased NO<sub>x</sub> levels in comparison with neat diesel operation on CE.

Experiments were conducted on preheated biodiesel in order to equalize their viscosity to that of diesel may ease the problems of injection process [11–13]. Investigations were carried out on engine with preheated vegetable oils. It was reported that preheated biodiesel marginally increased thermal efficiency, decreased particulate matter emissions and

NO<sub>x</sub> levels, when compared with normal biodiesel. By controlling the injector opening pressure and the injection rate, the spray cone angle is found to depend on injector opening pressure [14]. Few investigators reported that injector opening pressure has a significance effect on the performance and formation of pollutants inside the direct injection diesel engine combustion.[ 14–16]. They reported that particulate emissions decreased with increase of injector opening pressure.

The present paper attempted to determine exhaust emissions of engine with LHR combustion chamber which contained air gap insulated piston, air gap insulated liner and ceramic coated cylinder head with different operating conditions of linseed biodiesel with varied injection timing and pressure and compared with CE with biodiesel operation and also with diesel operation working on similar working conditions.

**2. MATERIAL AND METHOD**

**2.1 Preparation of biodiesel:**


The chemical conversion of esterification reduced viscosity four fold. Linseed oil contains up to 70 % (wt.) free fatty acids. The methyl ester was produced by chemically reacting crude linseed oil with methanol in the presence of a catalyst (KOH). A two-stage process was used for the esterification of the crude linseed oil [17]. The first stage (acid-catalyzed) of the process is to reduce the free fatty acids (FFA) content in linseed oil by esterification with methanol (99% pure) and acid catalyst (sulfuric acid-98% pure) in one hour time of reaction at 55°C. Molar ratio of linseed oil to methanol was 9:1 and 0.5% catalyst (w/w). In the second stage (alkali-catalyzed), the triglyceride portion of the linseed oil reacts with methanol and base catalyst (sodium hydroxide-99% pure), in one hour time of reaction at 65°C, to form methyl ester (biodiesel) and glycerol. To remove un-reacted methoxide present in raw methyl ester, it is purified by the process of water washing with air-bubbling. The properties of the Test Fuels used in the experiment were presented in Table-1.

**Table.1.** Properties Test Fuels

Test Fuel	Viscosity at 25°C (Centi-Stroke )	Specific gravity at 25°C	Cetane number	Lower Calorific value (kJ/kg)
Diesel	2.5	0.82	51	42000
Biodiesel (BD)	3.7	0.90	55	41000
ASTM Standard	ASTM D 445	ASTM D 4809	ASTM D 613	ASTM D 7314

**2.2 Fabrication of LHR engine**

The low heat rejection diesel engine contains a two part piston (Fig.1) – the top crown made of low thermal conductivity material, superni was screwed to aluminum body of the piston, providing a 3mm air gap in between the crown and the body of the piston by placing superni gasket in between piston crown and body of the piston. A superni insert was screwed to the top portion of the liner in such a manner that an air gap of 3mm is maintained between the insert and the liner body. Partially stabilized zirconium (PSZ) of thickness 500 microns was coated over inside portion of cylinder head.

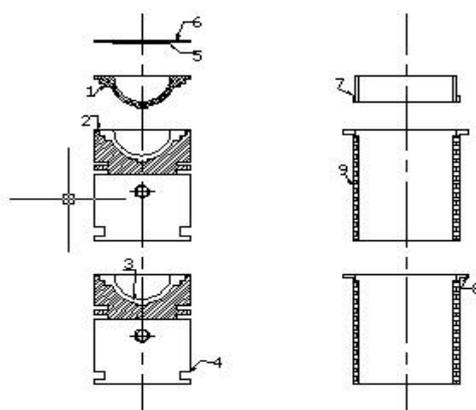


1.Superni crown with threads, 2. Superni gasket, 3.Air gap in piston, 4. Body of the piston, 5. Ceramic coating on inside portion of cylinder head, 6. Cylinder head, 7. Superni insert with threads, 8. Air gap in liner and 9. Body of liner

Fig.1. Schematic diagram of assembly the insulated piston, insulated liner and ceramic coated cylinder head of the engine with LHR-3 combustion chamber

**2.3. Experimental set-up**

The test fuel used in the experimentation was neat diesel and biodiesel. The schematic diagram of the experimental setup with biodiesel operation is shown in Fig. 2. The specifications of the experimental engine are shown in Table-2. Experimental setup used for study of exhaust emissions on low grade LHR diesel engine with linseed biodiesel in Fig.2 The specification of the experimental engine (Part No.1) is shown in Table.2 The engine was connected to an electric dynamometer (Part No.2. Kirloskar make) for measuring its brake power. Dynamometer was loaded by loading rheostat (Part No.3). The combustion chamber consisted of a direct injection type with no special arrangement for swirling motion of air. Burette (Part No.9) method was used for finding fuel consumption of the engine with the help of fuel tank (Part No.7) and three way valve (Part No.8). Air-consumption of the engine was measured by air-box method consisting of an orifice meter (Part No.4), U-tube water manometer (Part No.5) and air box (Part No.6) assembly.

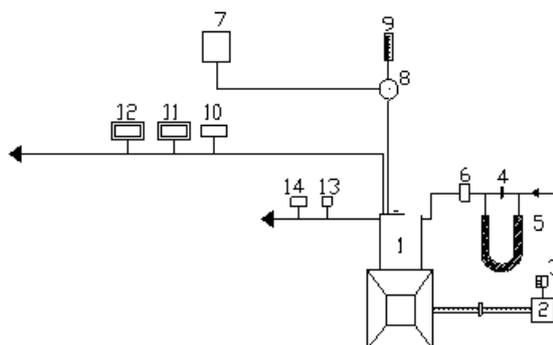

1.Engine, 2.Electical Dynamo meter, 3.Load Box, 4.Orifice meter, 5.U-tube water manometer, 6.Air box, 7.Fuel tank, 8, Pre-heater, 9.Burette, 10. Exhaust gas temperature indicator, 11.AVL Smoke meter, 12.Netel Chromatograph NOx Analyzer, 13.Outlet jacket water temperature indicator, 14. Outlet-jacket water flow meter,

Fig.2. Experimental Set-up

**Table.2** Specifications of the Test engine

Description	Specification
Engine make and model	Kirloskar ( India) AV1
Maximum power output at a speed of 1500 rpm	3.68 kW
Number of cylinders ×cylinder position× stroke	One × Vertical position × four-stroke
Bore × stroke	80 mm × 110 mm
Engine Displacement	553 cc
Method of cooling	Water cooled
Rated speed ( constant)	1500 rpm
Fuel injection system	In-line and direct injection
Compression ratio	16:1
BMEP @ 1500 rpm at full load	5.31 bar
Manufacturer’s recommended injection timing and injector opening pressure	27°bTDC × 190 bar
Dynamometer	Electrical dynamometer
Number of holes of injector and size	Three × 0.25 mm
Type of combustion chamber	Direct injection type

The naturally aspirated engine was provided with water-cooling system in which outlet temperature of water is maintained at 80°C by adjusting the water flow rate. Engine oil was provided with a pressure feed system. No temperature control was incorporated, for measuring the lube oil temperature. The naturally aspirated engine was provided with water-cooling system in which outlet temperature of water is maintained at 80°C by adjusting the water

flow rate, which was measured by water flow meter (Part No.14). Exhaust gas temperature (EGT) and coolant water outlet temperatures were measured with thermocouples made of iron and iron-constantan attached to the exhaust gas temperature indicator (Part No.10) and outlet jacket temperature indicator (Part No.13) Copper shims of suitable size were provided in between the pump body and the engine frame, to vary the injection timing and its effect on the performance of the engine was studied.

Exhaust emissions of particulate matter and nitrogen oxides (NO<sub>x</sub>) were recorded by smoke opacity meter (AVL India, 437) (Part No.11) and NO<sub>x</sub> Analyzer (Netel India; 4000 VM) (Part No.12) at full load operation of the engine. Table 3 shows the measurement principle, accuracy and repeatability of raw exhaust gas emission analyzers/ measuring equipment for particulate emissions and NO<sub>x</sub> levels. Analyzers were allowed to adjust their zero point before each measurement. To ensure that accuracy of measured values was high, the gas analyzers were calibrated before each measurement using reference gases.

**Table.3** Specifications of the Smoke Opacimeter (AVL, India, 437). And NO<sub>x</sub> Analyzer (Netel India ;4000 VM)

Pollutant	Measuring Principle	Range	Least Count	Repeatability
Particulate Emissions	Light extinction	1–100 %	0.1% of Full Scale (FS)	0.1% for 30 minutes
NO <sub>x</sub>	Chemiluminiscence	1–5000 ppm	0.5 % F.S	≤0.5% F.S

### 2.4 Operating conditions


The different configurations used in the experiment were conventional engine and engine with high grade LHR combustion chamber. The various operating conditions of the biodiesel used in the experiment were normal temperature (NT) and preheated temperature (PT–It is the temperature at which viscosity of the biodiesel is matched to that of diesel fuel, 80°C). Various test fuels used in the experiment were biodiesel and diesel.

## 3. RESULTS AND DISCUSSION

### 3.1 Fuel performance


The optimum injection timing was 31° bTDC with CE, while it was 28° bTDC for engine with High grade LHR combustion chamber with diesel operation [18].

Fig.3 shows variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) with biodiesel operation on CE. From Fig.3, it is observed CE with biodiesel at 27° bTDC showed comparable performance at all loads with improved combustion with the presence of oxygen, when compared with diesel operation on CE at 27° bTDC. CE with biodiesel operation at 27° bTDC decreased peak BTE by 3%, when compared with diesel operation on CE. Low calorific value and high viscosity of biodiesel might have reduced peak BTE. CE with biodiesel operation increased BTE at all loads with advanced injection timing, when compared with CE with biodiesel operation at 27° bTDC. Initiation of combustion at early period and increase of resident time of fuel with might have improved atomization and hence combustion. CE with biodiesel operation showed comparable peak BTE an optimum injection timing of 31° bTDC, when compared with diesel operation at 27° bTDC.

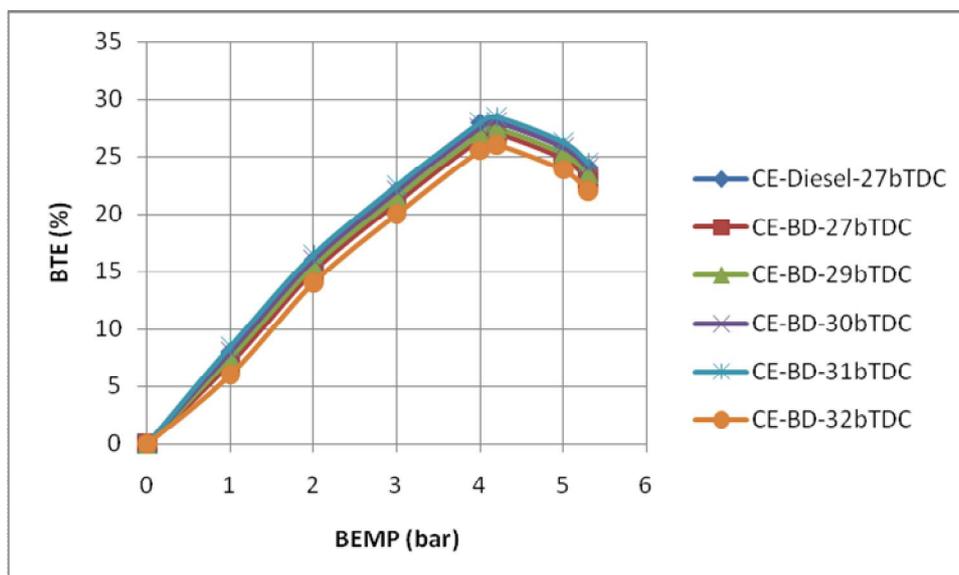

**Fig.3.** Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in conventional engine (CE) and with various injection timings at an injector opening pressure of 190 bar with linseed biodiesel (BD)


Fig.4 shows variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) with biodiesel operation on LHR-3 engine. Curves in Fig.4 indicate that LHR version of the engine at recommended injection timing showed the improved performance at all loads compared with CE with neat diesel operation. High cylinder temperatures helped in improved evaporation and faster combustion of the fuel injected into the combustion chamber. Reduction of ignition delay of the vegetable oil in the hot environment of the LHR combustion chamber improved heat release rates and efficient energy utilization. The optimum injection timing was found to be 28° bTDC with LHR-3 combustion chamber with different operating conditions of biodiesel operation. Since the hot combustion chamber of LHR-3 combustion chamber reduced ignition delay and combustion duration and hence the optimum injection timing was obtained earlier with LHR combustion chamber when compared to conventional engine with the biodiesel operation

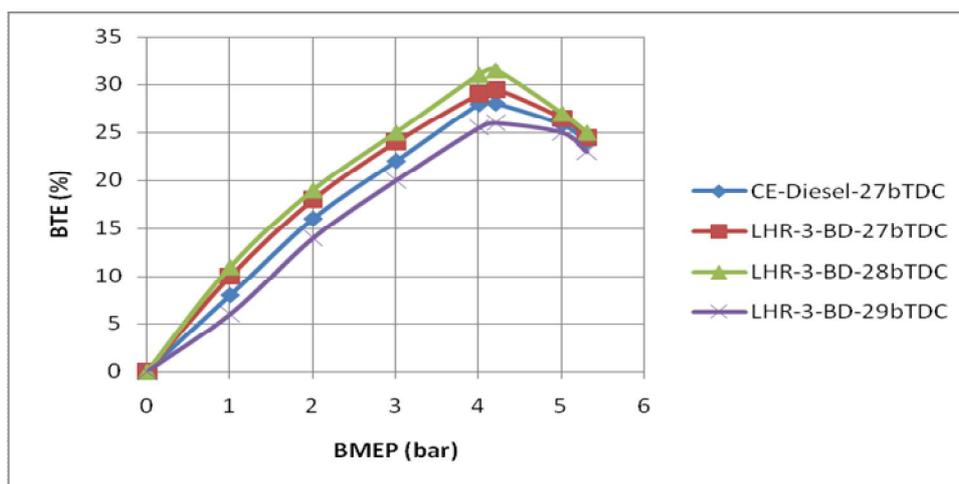

**Fig.4** Variation of brake thermal efficiency (BTE) with brake mean effective pressure (BMEP) in LHR-3 combustion chamber at different injection timings with biodiesel (BD) operation.


**3.2 Exhaust emissions**

Fig.5 shows variation of particulate emissions with biodiesel operation on both versions of the engine at recommended injection timing and optimum injection timing. From Fig.5, it is noticed that during the first part, particulate emissions were more or less constant, as there was always excess air present. However, at the higher load range there was an abrupt rise in particulate emissions due to less available oxygen, causing the decrease of air–fuel ratio, leading to incomplete combustion, producing more particulate emissions. From Fig.5, it is noticed that particulate emissions at all loads reduced marginally with CE with biodiesel operation in comparison with diesel operation on CE. Improved combustion with improved cetane number and also with presence of oxygen in composition of fuel might have reduced particulate emissions. Particulate emissions further reduced with engine with LHR-3 combustion chamber, when compared with CE. Improved combustion with improved heat release rate might have further reduced particulate emissions. Particulate emissions at full load reduced with advanced injection timing with both versions of the combustion chamber. Increase of resident time and more contact of fuel with air leading to increase atomization have reduced particulate emissions.

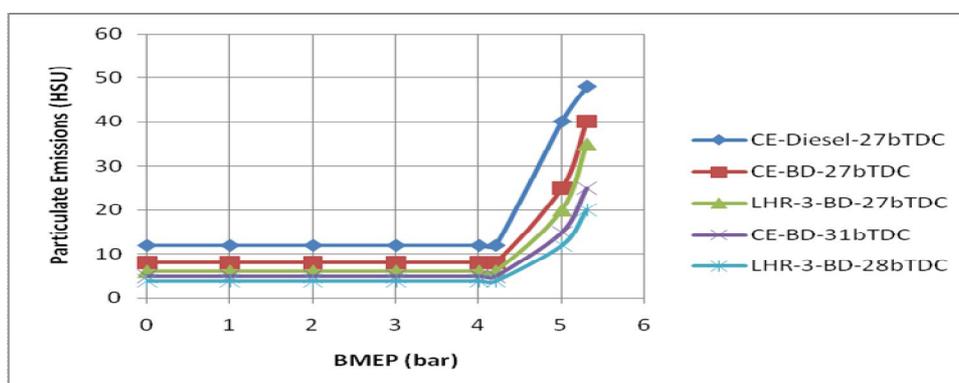

**Fig.5.** Variation of particulate emissions in Hartridge smoke unit (HSU) with brake mean effective pressure (BMEP) in both versions of the engine at recommended injection timing and optimum injection timing and at an injector opening pressure of 190 bar with biodiesel (BD)


Fig.6 presents bar charts showing the variation of particulate emissions at full load with both versions of the engine at recommended injection timing and optimum injection timing with test fuels of diesel and biodiesel at an injection pressure of 190 bar.

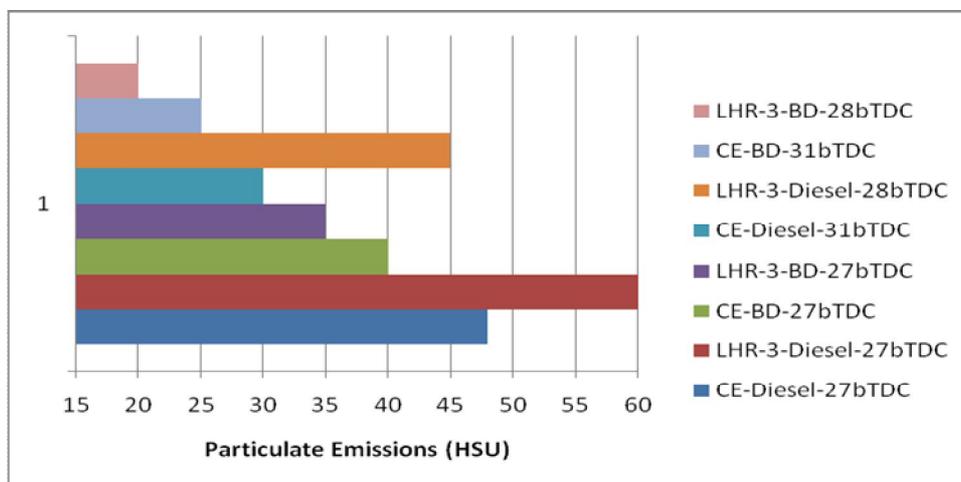

**Fig.6.** Bar charts showing the variation of particulate emissions at full load with both versions of the engine at recommended injection timing and optimum injection timing with test fuels of biodiesel and diesel.

CE reduced particulate emissions at full load by 16% at recommended injection timing and 16% at optimum injection timing with biodiesel operation on CE when compared with diesel operation on CE. LHR-3 engine decreased particulate emissions at full load by 42% at recommended injection timing and 56% at optimum injection timing in comparison with LHR-3 engine with diesel operation, which showed that LHR-3 engine was more suitable for biodiesel operation. LHR-3 engine reduced particulate emissions at full load by 12% at recommended injection timing and 20% at optimum injection timing with biodiesel operation in comparison with CE with biodiesel operation, which showed that LHR-3 engine was more suitable for biodiesel.

Fig.7 shows variation of nitrogen oxide ( $NO_x$ ) emissions with biodiesel operation on both versions of the engine at recommended injection timing and optimum injection timing.

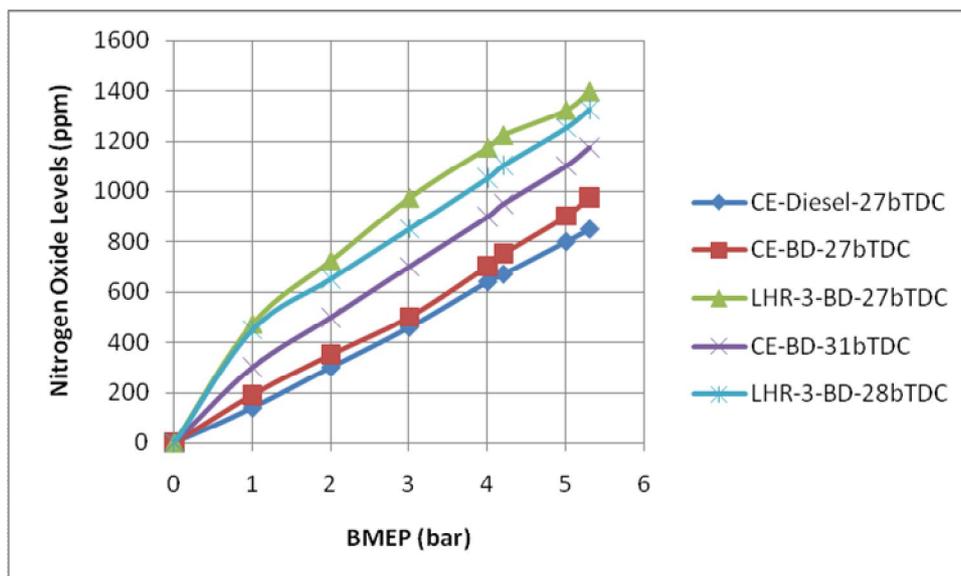


**Fig.7** Variation of nitrogen oxide levels with brake mean effective pressure (BMEP) in both versions of the engine at recommended injection timing and optimum injection timing and at an injector opening pressure of 190 bar with linseed biodiesel (BD)

$NO_x$  concentrations raised steadily with increasing BMEP at constant injection timing. At part load,  $NO_x$  concentrations were less in both versions of the engine. Availability of excess oxygen and high temperatures with consumption of fuel increased  $NO_x$  levels with both versions of the engine. At remaining loads,  $NO_x$  concentrations

steadily increased with the load in both versions of the engine. This was because, local NO<sub>x</sub> concentrations raised from the residual gas value following the start of combustion, to a peak at the point where the local burned gas equivalence ratio changed from lean to rich.

Curves in Fig.7 indicate that NO<sub>x</sub> levels at all loads were marginally higher in CE, while they were drastically higher in engine with LHR combustion chamber at different operating conditions of the biodiesel at the full load when compared with diesel operation on CE. This was also due to the presence of oxygen (10%) in the methyl ester, which leads to improvement in oxidation of the nitrogen available during combustion. This will raise the combustion bulk temperature responsible for thermal NO<sub>x</sub> formation. Increase of combustion temperatures with the faster combustion and improved heat release rates associated with the availability of oxygen in LHR engine caused drastically higher NO<sub>x</sub> levels in engine with LHR combustion chamber. The linseed biodiesel having long carbon chain (C<sub>20</sub>-C<sub>32</sub>) recorded more NO<sub>x</sub> than that of fossil diesel having both medium (C<sub>8</sub>-C<sub>14</sub>) as well as long chain (C<sub>16</sub>-C<sub>28</sub>). The increase in NO<sub>x</sub> emission might be an inherent characteristic of biodiesel due to the presence of 54.9% of mono-unsaturated fatty acids(MUFA) and 18% of poly-unsaturated fatty acids (PUFA). That means, the long chain unsaturated fatty acids (MUFA and FUPA) such as oleic C18:1 and linoleic C18:2 fatty acids are mainly responsible for higher levels of NO<sub>x</sub> emission. Another reason for higher NO<sub>x</sub> levels is the oxygen (10%) present in the methyl ester. The presence of oxygen in normal biodiesel leads to improvement in oxidation of the nitrogen available during combustion. This will raise the combustion bulk temperature responsible for thermal NO<sub>x</sub> formation.

Fig.8 presents bar charts showing the variation of NO<sub>x</sub> emissions at full load with both versions of the engine at recommended injection timing and optimum injection timing with test fuels of diesel and biodiesel at an injection pressure of 190 bar

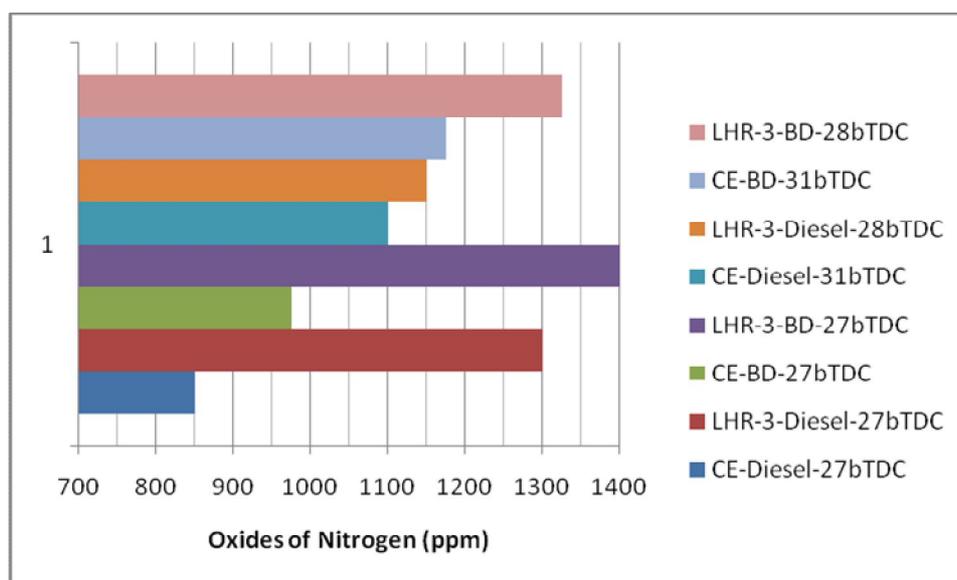

**Fig.8** Bar charts showing the variation of nitrogen oxide levels at full load with both versions of the engine at recommended injection timing and optimum injection timing with test fuels of biodiesel and diesel.

CE increased NO<sub>x</sub> emissions at full load by 15% at recommended injection timing and 7% at optimum injection timing with biodiesel operation on CE when compared with diesel operation on CE. LHR-3 engine increased NO<sub>x</sub> levels at full load by 8% at recommended injection timing and 15% at optimum injection timing in comparison with LHR-3 engine with diesel operation. LHR-3 engine increased NO<sub>x</sub> emissions at full load by 43% at recommended injection timing and 13% at optimum injection timing with biodiesel operation in comparison with CE with biodiesel operation..

Table 4 shows data of exhaust emissions at full load with varied injection pressure and at different operating conditions of the biodiesel.

**Table.4** Data of Particulate Emissions and NO<sub>x</sub> levels at full load operation

Injection timing (deg. bTDC)	Combustion chamber version	Test Fuel	Particulate Emissions (HSU)				NO <sub>x</sub> Emissions (ppm)			
			Injection Pressure (bar)				Injection Pressure (bar)			
			190		270		190		270	
			Operating Condition				Operating Condition			
			NT	PT	NT	PT	NT	PT	NT	PT
27	CE	Diesel	48	---	---	---	850	---	950	----
	CE	BD	40	35	30	25	975	925	1025	975
	LHR	Diesel	60	---	50	---	1300	---	1200	---
	LHR	BD	35	30	25	20	1400	1325	1250	1175
28	LHR	Diesel	45	--	35	---	1150	---	1050	---
	LHR	BD	20	15	20	15	1325	1250	1150	1075
31	CE	Diesel	30	--	35	--	1100	---	1200	---
	CE	BD	25	20	30	25	1175	1225	1250	1200

From Table.4, it is understood that particulate emissions decreased with preheating of biodiesel with both versions of the combustion chamber. This was because of reduction of density, viscosity of fuel and improved spray characteristics of fuel. Particulate emissions at full load decreased with an increase of injection pressure with both versions of the engine. Improved spray characteristics with an increase of injection pressure might have reduced particulate emissions. Data in Table.4 shows that, NO<sub>x</sub> levels decreased with preheating of biodiesel. As fuel temperature increased, there was an improvement in the ignition quality, which caused shortening of ignition delay.. A short ignition delay period lowered the peak combustion temperature which suppressed NO<sub>x</sub> formation .NOx levels increased marginally with CE, while they decreased in LHR-3 engine with an increase of injection pressure with biodiesel operation. Increase of gas temperature NO<sub>x</sub> slightly increased with test fuels as injector opening pressure increased. This was because of improved combustion causes higher peak brake thermal efficiency due to higher combustion chamber pressure and temperature, which leads to higher NO<sub>x</sub> formation. This is an evident proof of enhanced spray characteristics, thus improving fuel air mixture preparation and evaporation process. Reduction of gas temperatures with improved combustion with improved air fuels ratios in LHR-3 engine reduced the formation of NOx levels

#### 4. CONCLUSIONS

Advanced injection timing improved exhaust emissions with biodiesel operation on engine with LHR combustion chamber. Preheated biodiesel reduced particulate emissions and NO<sub>x</sub> levels in both versions of the combustion chamber.

Comparison with CE with biodiesel: Engine with high grade LHR combustion chamber with linseed biodiesel decreased particulate emissions at full load operation by 12% at 27° bTDC and 20% at 28° bTDC in comparison with CE at 27° bTDC and 31° bTDC. It increased nitrogen oxide levels by 43% at 27° bTDC, and 13% at 28° bTDC in comparison with CE at 27° bTDC and 31° bTDC.

Comparison with diesel operation:

Conventional engine with biodiesel operation decreased particulate emissions at full load operation by 16% at 27° bTDC and 16% at 31° bTDC in comparison with CE at 27° bTDC and 31° bTDC with diesel operation. Engine with LHR combustion chamber with biodiesel decreased particulate emissions at full load operation by 42% at 27° bTDC and 56% at 28° bTDC in comparison with same configuration of the combustion chamber with diesel operation at 27° bTDC and 28° bTDC.

Conventional engine with biodiesel operation increased nitrogen oxide levels at full load operation by 15% at 27° bTDC and 7% at 31° bTDC in comparison with CE at 27° bTDC and 31° bTDC with diesel operation. Engine with LHR combustion chamber with biodiesel increased nitrogen oxide levels at full load operation by 8% at 27° bTDC and 5% at 28° bTDC in comparison with same configuration of the combustion chamber with diesel operation at 27° bTDC and 28° bTDC.

#### 4.1. Research findings

Exhaust emissions from engine with air gap insulation along with ceramic coated cylinder head were studied with varied injection timing and injection pressure at different operating conditions of linseed biodiesel.

#### 4.2Recommendations

Engine with low grade LHR combustion chamber gave higher levels of NO<sub>x</sub> at full load operation, These emissions can be controlled by selective catalytic reduction technique [19].

#### 4.3 Scientific significance

Change of injection timing was attempted to reduce pollutants from the engine along with change of configuration of combustion chamber with different operating conditions of the biodiesel.

#### 4.4 Social significance

Use of renewable fuels will strengthen agricultural economy, which curbs crude petroleum imports, saves foreign exchange and provides energy security besides addressing the environmental concerns and socio-economic issues.

#### 4.5 Novelty

Change of injection timing of the engine was accomplished by inserting copper shims between pump body and engine frame

### ACKNOWLEDGMENTS

Authors thank authorities of Chaitanya Bharathi Institute of Technology, Hyderabad for providing facilities for carrying out research work. Financial assistance provided by All India Council for Technical Education (AICTE), New Delhi is greatly acknowledged.

### REFERENCES

- [1]. R.D. Misra, and M.S. Murthy, "Straight vegetable oils usage in a compression ignition engine—A review," *Renew Sustain Energy Rev*, 14, pp 3005–3013, 2010.
- [2]. No. Soo-Young, "Inedible vegetable oils and their derivatives for alternative diesel fuels in CI engines: A review," *Renew Sustain Energy Rev*, 15, pp 131–149.
- [3]. Avinash Kumar Agarwal, and Atul Dhar, "Experimental investigations of performance, emission and combustion characteristics of Karanja oil blends fuelled DICI engine," *Renewable Energy*, 52, pp 283–291, 2013..
- [4]. P.M. McCarthy, M.G. Rasul, and S. Moazzem, "Analysis and comparison of performance and emissions of an internal combustion engine fuelled with petroleum diesel and different biodiesels," *Fuel*, 90, pp 2147–2157, 2011.
- [5]. Anirudh Gautam, and Avinash Kumar Agarwal. "Experimental investigations of comparative performance, emission and combustion characteristics of a cottonseed biodiesel fueled four–stroke locomotive diesel engine," *Int J Engine Res*, 14, pp 354–360, 2013.
- [6]. Maddali Krishna, and R. Chowdary, "Comparative studies on performance evaluation of waste fried vegetable oil in crude form and biodiesel form in conventional diesel engine," *SAE Paper 2014–01–1947*, 2014.
- [7]. T. Ratna Reddy, M.V.S. Murali Krishna, Ch. Kesava Reddy, and P.V.K. Murthy, "Performance evaluation of a low heat rejection diesel engine with mohr oil based biodiesel," *British Journal of Applied Science & Technology*, 2(2), 179-198, 2012.
- [8]. N. Venkateswara Rao, M.V.S. Murali Krishna, and P.V.K. Murthy, "Effect of injector opening pressure and injection timing on exhaust emissions and combustion characteristics of high grade low heat rejection diesel engine with tobacco seed oil based biodiesel," *Int J of Recent Technology and Engineering* 2(4), pp 70-79, 2013.
- [9]. B. Subba Rao, E. Ramjee, P.V.K. Murthy and M.V.S.Murali Krishna. "Studies on exhaust emissions and combustion characteristics of tobacco seed oil in crude form and biodiesel from a high grade low heat rejection diesel engine," *International Journal of Industrial Engineering and Technology*, 3(1), 27-36, 2013..
- [10]. M.V.S. Murali Krishna, N. Durga Prasada Rao, B. Anjenaya Prasad and P.V. K. Murthy. "Comparative studies on exhaust emissions and combustion characteristic of direct injection diesel engine with different combustion chamber with rice bran oil based biodiesel," *International Journal of Engineering and Innovative Technology*, 3(6), pp 163-173.
- [11]. M. Canaker, A.N. Ozsezen, and A. Turkcan, "Combustion analysis of preheated crude sunflower oil in an IDI diesel engine," *Biomass Bio-energy*, 33, pp 760–770, 2009.
- [12]. Hanbey Hazar, and Huseyin Aydin, "Performance and emission evaluation of a CI engine fueled with preheated raw rapeseed oil (RRO)-diesel blends," *Applied Energy*, 87, pp 786–790, 2010.
- [13]. A.K. Agarwal and A. Dhar, "Experimental investigation of preheated Jatropha oil fuelled direct injection compression ignition engine: Part I, performance, emission and combustion characteristics," *Journal of ASTM International*, 7, pp 1–13, 2010.
- [14]. Y. Cingur, and D. Altiparmak, "Effect of cetane number and injection pressure on a DI diesel engine performance and emissions," *Energy Conversion and Management*, 44, pp 389–397, 2003.
- [15]. D.T. Hountalas, D.A. Kouremenos, K.B. Binder, V. Schwarz, and G.C. Mavropoulos, "Effect of injection pressure on the performance and exhaust emissions of a heavy duty DI diesel engine," *SAE Technical Paper No. 2003-01-0340*. Warrendale, PA, 2003.

- [16].B.K. Venkanna, and R.C. Venkataramana, "Influence of fuel injection rate on the performance, emission and combustion characteristics of DI diesel engine running on calophyllum inophyllum linn oil (honne oil)/diesel fuel blend, SAE Technical Paper No. 2010-01-196, 2010..
- [17].Md NURUN NABI, S.M NAJMUL HOQUE, "BIODIESEL PRODUCTION FROM LINSEED OIL AND PERFORMANCE STUDY OF A DIESEL ENGINE WITH DIESEL BIO-DIESEL," JOURNAL OF MECHANICAL ENGINEERING, 39(1), PP 40–44, 2008..
- [18].M.V.S. Murali Krishna, N. Janardhan, Ch. Kesava Reddy, and P.V. Krishna Murthy, "Experimental investigations on DI diesel engine with different combustion chambers," British Journal of Applied Science & Technology, 6(3), pp239–260,2014.
- [19].N. Janardhan, P. Usha Sri, M.V.S. Murali Krishna, and P.V.K. Murthy, "Performance of biodiesel in low heat rejection diesel engine with catalytic converter." International Journal of Engineering and Advanced Technology, 2(2), pp 97–109, 2012..